



Single Fiber

Design & Produce from Thailand

OEM. Welcome



## Gigabit Converter Switch

### Model


- MC-4G-S25S-A 4 ports Gigabit Converter Switch 10/100/1000, Single Mode, 25 km, SC Connector, A-1310 nm
- MC-4G-S25S-B 4 ports Gigabit Converter Switch 10/100/1000, Single Mode, 25 km, SC Connector, A-1550 nm
- MC-4G-S25F-A 4 ports Gigabit Converter Switch 10/100/1000, Single Mode, 25 km, FC Connector, A-1310 nm
- MC-4G-S25F-B 4 ports Gigabit Converter Switch 10/100/1000, Single Mode, 25 km, FC Connector, A-1550 nm

### Features

- 4 ports 10/100/1000Mbps Gigabit on Cat5 cable
- Auto MDI/MDIX cross over for all ports
- True Plug-and-Play supported with Auto-Crossover, Auto-Negotiation and Auto-Polarity.
- Supports IEEE 802.3x flow control for Full Duplex mode and backpressure for Half Duplex mode
- Supports up to 10K byte JUMBO frames
- Non-blocking four traffic class QoS switch fabric
- Very long distance with 25km fiber optic cable length.
- Use only single fiber optic cable for Full-Duplex communication with WDM.

### Specifications

- Standards :IEEE802.3, IEEE802.3u, IEEE802.3x 10/100/1000Base-T copper and 1000Base-X standards.
- Data rate : 10Mbps full duplex, 100Mbps full duplex, 1000Mbps full duplex
- Connectors : RJ-45 UTP
- Fiber optic cable : Single mode
- Fiber optic connector : SC,FC (other type is optional)
- Fiber optic wave length : 1310nm/1550nm WDM
- Fiber optic maximum cable length : 25km (40km, 60km, 80km optional)
- Fiber optic standards : ITU-T G.957, G.958
- Power Requirement : 500mA +5VDC

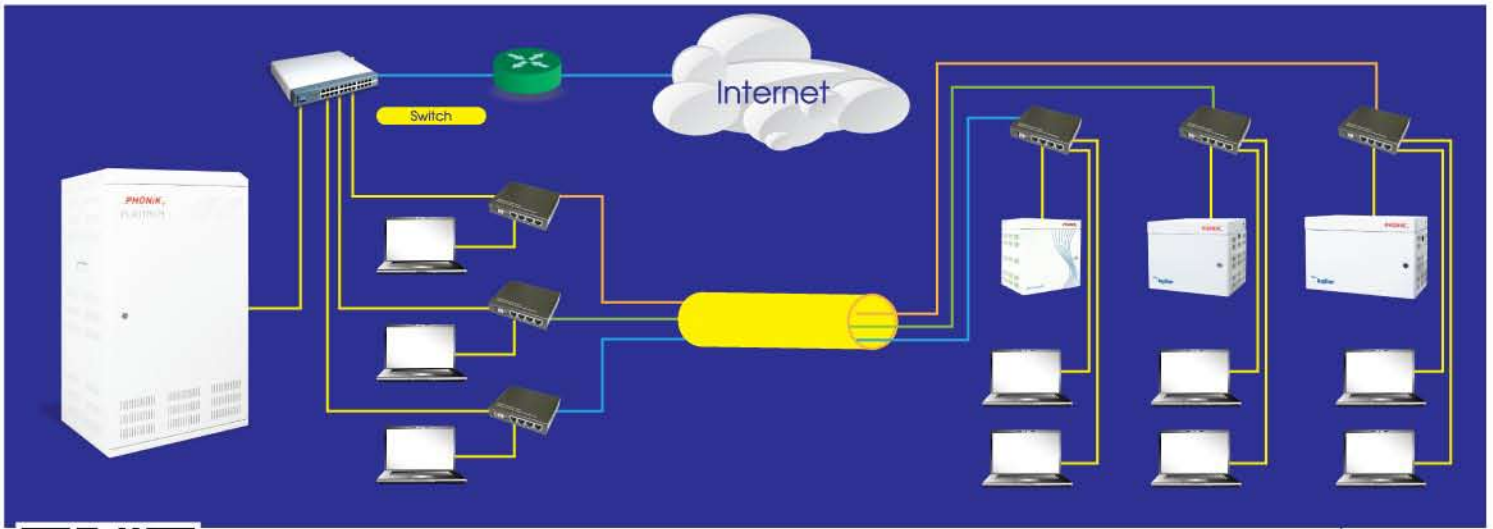

สอบถามข้อมูลเพิ่มเติมได้ที่...

บริษัท โฟนนิค (ประเทศไทย) จำกัด

TEL : 02-206-5555 FAX : 02-206-5599  
E-mail : support@phonik.com , www.phonik.com

เลือกสินค้าคุณภาพ  
ของาสัญลักษณ์ **PHONiK.**